


Function

Wire Color

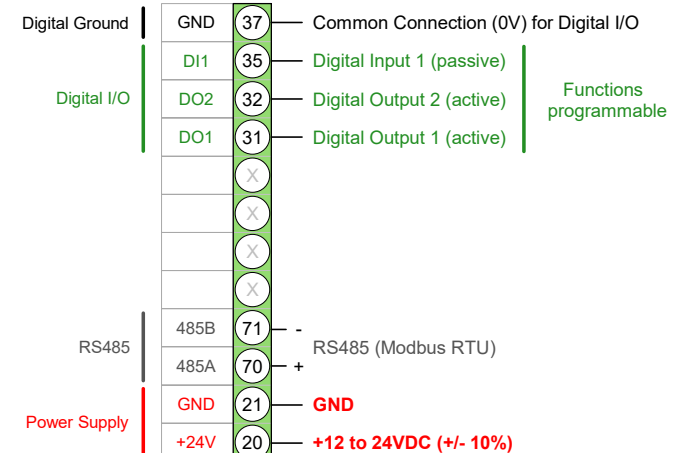

1 Best protection against electromagnetic interference is achieved by connection of the cable screens to PE.
For special cases with longer cables and small differences in earth potential between RHM and RHE installation the screens can be connected to PE_C. In case of substantial potential differences a potential equalization cable is mandatory.

⚠ When connecting the sensor and transmitter the respective local code for electrical installations must be considered.
🔌 Do not change the installation under power.